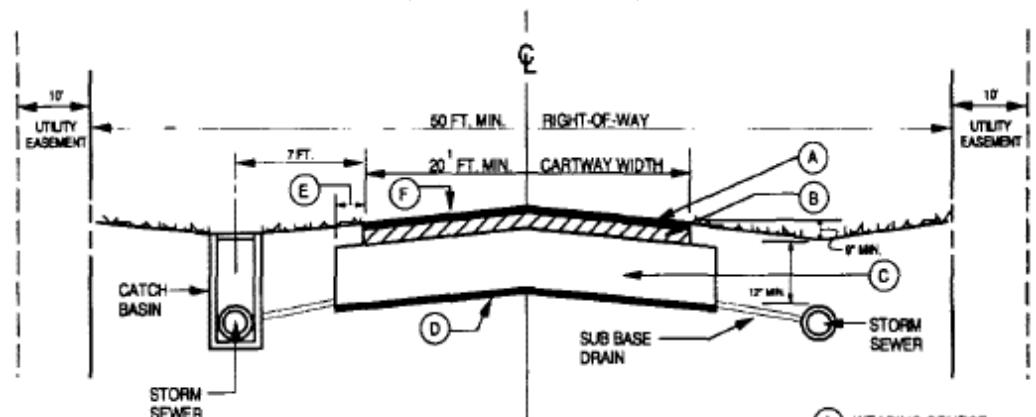


22 Attachment 1


City of Hermitage

MINOR & RESIDENTIAL STREETS

Typical Cross-Sections
(NOT TO SCALE)ALTERNATE A - NO CURBING

NOTE: STORM SEWER REQUIRED ON BOTH SIDES OF STREET

- (A) WEARING COURSE
- (B) BINDER COURSE
- (C) SUB BASE
- (D) SUB BASE GEOTEXTILE FABRIC
- (E) SUB BASE TO EXTEND 1 FT. BEYOND PAVEMENT
- (F) 3/16" FT. MIN. - 3/8" FT. MAX. CROWN SLOPE

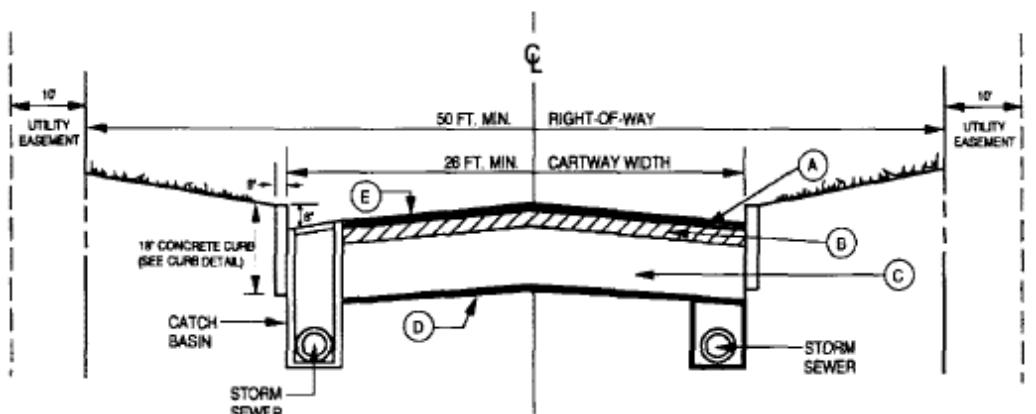ALTERNATE B - CONCRETE CURB

NOTE: STORM SEWER REQUIRED ON BOTH SIDES OF STREET

- (A) WEARING COURSE
- (B) BINDER COURSE
- (C) SUB BASE
- (D) SUB BASE GEOTEXTILE FABRIC
- (E) 3/16" FT. MIN. - 3/8" FT. MAX. CROWN SLOPE

Drawing amended per Ordinance No. 13-93