


SUBDIVISION AND LAND DEVELOPMENT

22 Attachment 1

City of Hermitage


MINOR & RESIDENTIAL STREETS
Typical Cross-Sections
 (NOT TO SCALE)
 [Ord. 18-91, 12/12/1991, Appendix 1]

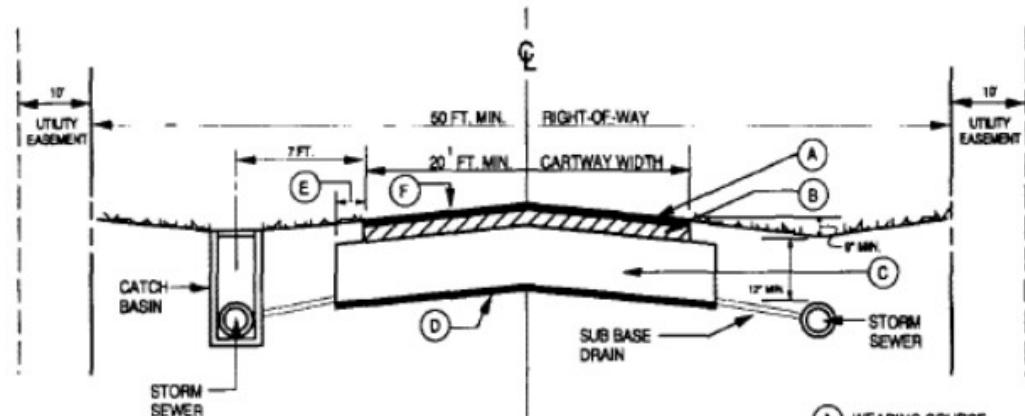

ALTERNATE A - NO CURBING

NOTE: STORM SEWER REQUIRED ON BOTH SIDES OF STREET

- (A) WEARING COURSE
- (B) BINDER COURSE
- (C) SUB BASE
- (D) SUB BASE GEOTEXTILE FABRIC
- (E) SUB BASE TO EXTEND 1 FT. BEYOND PAVEMENT
- (F) 3/16" FT. MIN. - 3/8" FT. MAX. CROWN SLOPE

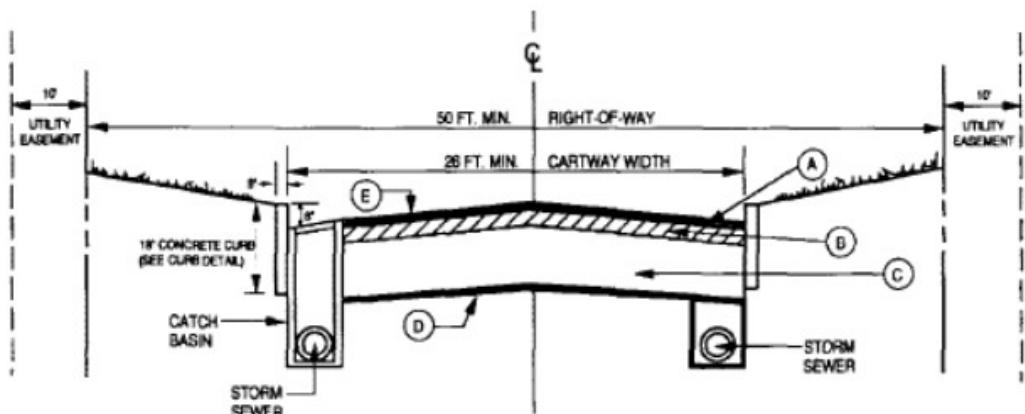

ALTERNATE B - CONCRETE CURB

NOTE: STORM SEWER REQUIRED ON BOTH SIDES OF STREET

- (A) WEARING COURSE
- (B) BINDER COURSE
- (C) SUB BASE
- (D) SUB BASE GEOTEXTILE FABRIC
- (E) 3/16" FT. MIN. - 3/8" FT. MAX. CROWN SLOPE

Drawing amended per Ordinance No. 13-93

